

SubConn® High Power

4 contacts

Connector specifications

Voltage rating	600 V AC rms
DC rating	85% of above AC rating
Current rating (water)	50 A per contact (max 200 A per connector)
Current rating (air)	28 A per contact (max 112 A per connector)
Insulation resistance	> 200 Mohm
Contact resistance	< 0.01 ohm
Wet matings	> 500
Temperature rating (water)	- 4 to 60°C, 25 to 140°F
Temperature rating (air)	- 40 to 60°C, - 40 to 140°F
Storage temperature rating	- 40 to 60°C, - 40 to 140°F
Depth rating	1,400 bar, 20,000 psi
Depth rating PEEK	300 bar, 4,350 psi

Material specifications

Connector body	Chloroprene rubber
Bulkhead body	Brass, stainless steel, titanium or anodised aluminium
Contacts	Brass UNS - C36000
Location pin	Stainless steel AISI 303
O-rings	Nitrile
Locking sleeves	POM
Snap rings	Stainless steel AISI 302
Inline cable (60 cm, 2 ft)	8 AWG 8.36 mm ² chloroprene rubber
Bulkhead leads (30 cm, 1 ft)	10 AWG 5.26 mm ² tagged PTFE

Face view (male)




Inline cable colour code

1 Black	4 Green
2 White	
3 Red	

Nominal cable outside diameter (OD)

4 conductor cable 0.715", 18.2 mm

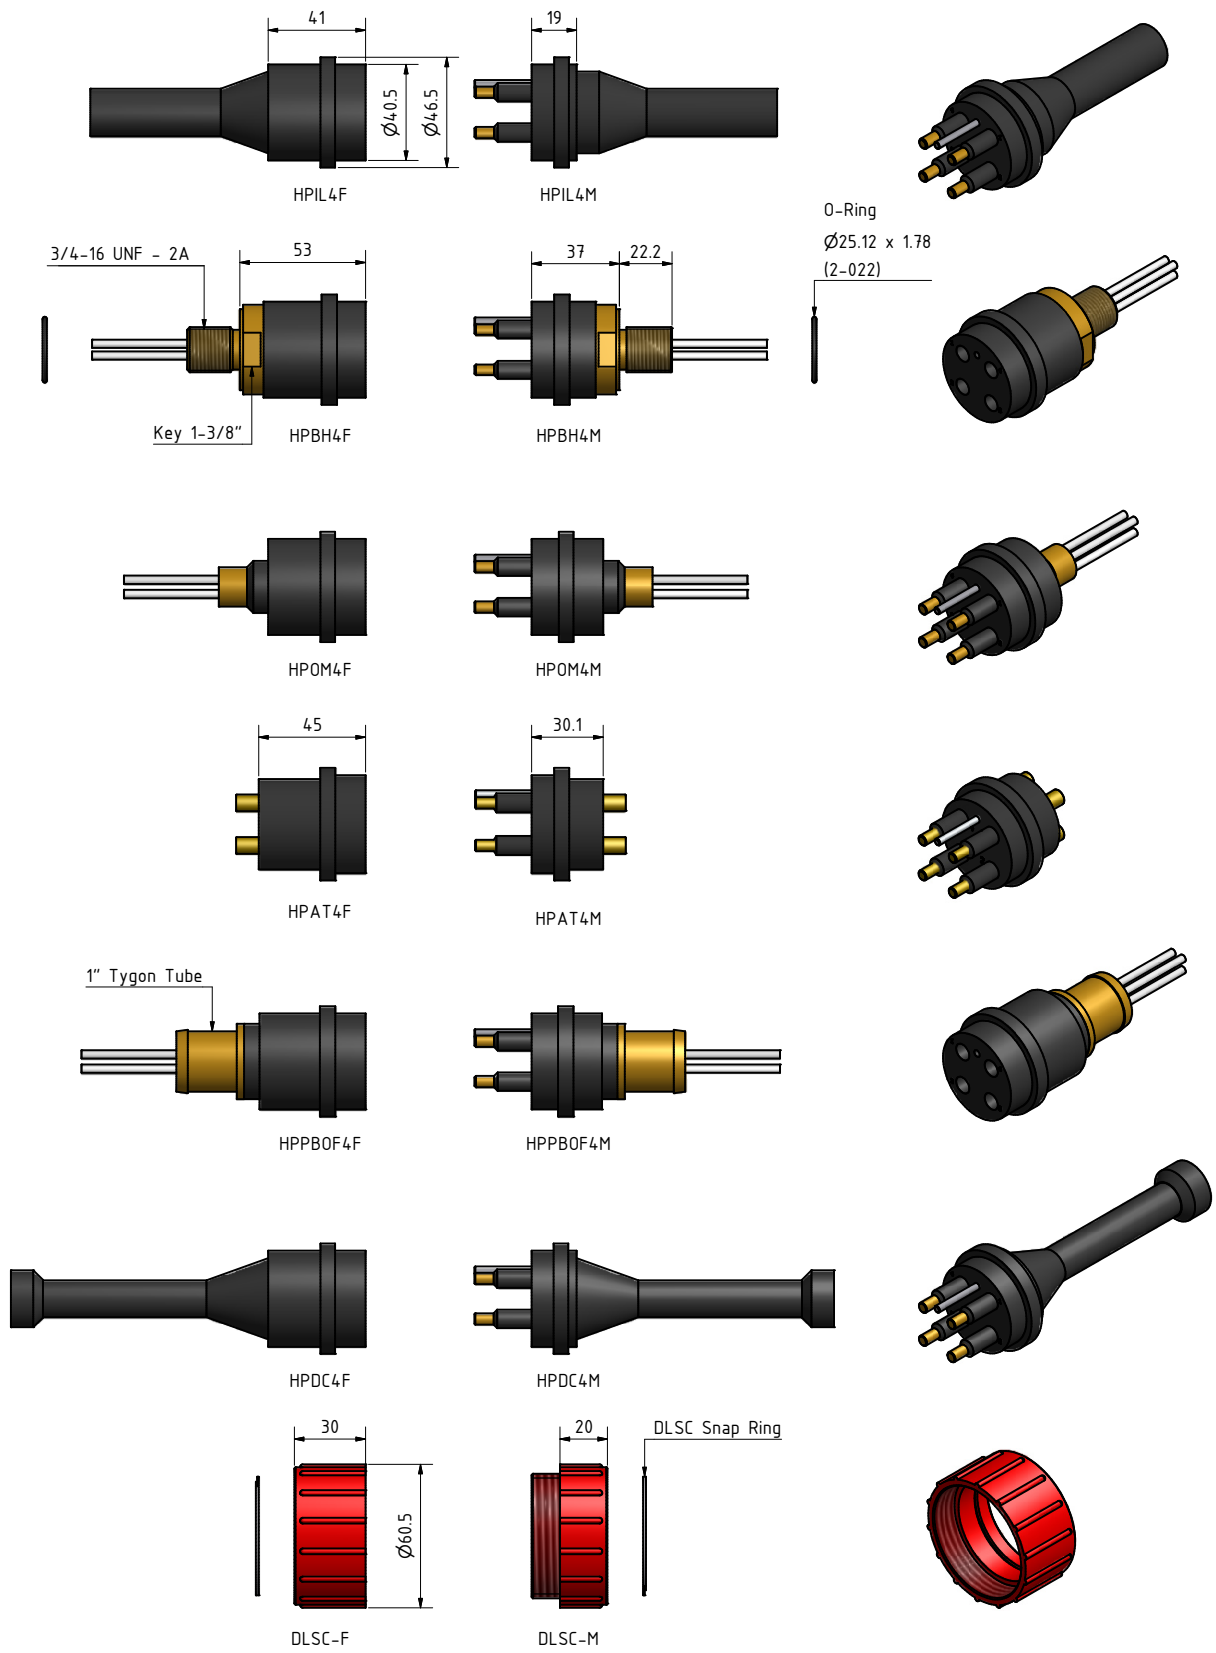

Drawing information

Dimensions in mm (1 mm = 0.03937 inch)
Threads in inches (1 inch = 25.4 mm)