


Abbreviation list

Connectors



MC BH RA 2 F

D	Data (Ethernet)
LP	Low Profile
MC	Micro
HP	High Power
RS	Reed Switch
50CX	50 Ohm Coax
75CX	75 Ohm Coax
BH	Bulkhead
IL	Inline
OM	Overmould
AT	Attachable
DC	Dummy
PBOF	Pressure Balanced Oil Filled
RA	Right Angle
S	SplitConn
V	VentConn
B	Battery
M	Mini
2	Number of contacts
F	Female sockets
M	Male pins
H	Hermaphroditic
SS	Stainless Steel
AS	Anodized Aluminium
TI	Titanium
UNS32550	Super Duplex
NM	Non Metallic
G2	2nd Generation
WB	Water Blocked
2 O-ring	Double O-ring
GP	Gold plated contacts

Locking sleeves (LS)




DLSA-F

DLS A - F

DLS	Delrin
BLS	Brass
MCDLS	Micro Delrin
SSLS	Stainless steel
MCDDWLS	Micro Delrin Dual way
MCSSDWLS	Micro Stainless Steel Dual way
A	2, 3, 4, and 5 contacts Micro 10, 12 and 16 contacts
B	1, 6, 8, 10 and 21 contacts
C	12, 16 and 25 contacts
F	½ pair female
M	½ pair male
H	½ pair hermaphroditic
-	Complete pair

Metal Shell connectors

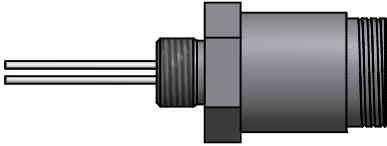

BCR2002F

BCR 2002 F

D	Data (Ethernet)
BCR	Bulkhead connector receptable
FCR	Flange connector receptable
20xx	Shell size (series)
xx04	Number of contacts
F	Female socket
M	Male pins
AS	Anodized Aluminium
TI	Titanium

Locking sleeves (LS)



LS2000

LS 2000

LS	Delrin
SSLS	Stainless steel
2000	Shell size (series)
1500	Metal Shell series uses MCDLS locking sleeves